



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com



Company:

Ship To:

Account Number:

Date:

Address:

Quote: PO Number:

City:

State:

ATP:

Zip:

Phone:

Marked For:

Email/Fax:

Associated Quote/Order#:

Effective: 1/10/2024

Ethos (K0005, E1235) \$3126
Ethos Standard Frame, 275 lb weight capacity

Frame

Seat Width

See reference A on page 8

12"	N/C
13"	N/C
14"	N/C
15"	N/C
16"	N/C
17"	N/C
18"	N/C
19"	N/C
20" (E2201)	\$564

Seat Depth

See reference B on page 8

14"	N/C
15"	N/C
16"	N/C
17"	N/C
18"	N/C
19"	N/C
20" (E2203)	\$564

Transit Option

Transit System	\$340
Cannot be retrofitted	
Omit	N/C

Sling Position

In Performance Position (0"), sling is at front of frame. The 1" or 2" sling position extends the frame in front of the sling by that amount. See reference C on page 8.

0" (Performance)	N/C
1"	N/C
2" (Classic)	N/C

Adjustable Depth

Adds the capability to grow seat in depth

No Rear Adjustment	N/C
1/2"	N/C
1"	\$169
1 1/2"	\$169
2"	\$169

Seat Pan

Standard Seat Sling	N/C
Aluminum Solid Seat Pan (E2231)	\$272
Omit Seat Sling	N/C

Front Frame Bend

Angle between front seat tube and ground. See reference D on page 8.

90°	N/C
85°	N/C
80°	N/C
75°	N/C
70°	N/C



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com



Polymer Setup

Setup determines characteristics of ride experience. For more information visit www.kimobility.com. If no selection is made Standard Setup will be used. Every chair includes one stage up and one stage down from what is assembled at time of build. Refer to the ISO TECH Setup Guide for more information.

Standard Setup

Polymer configuration calculated by chair size. No additional information required.

Standard _____ N/C

Setup by Ki

A series of intelligent calculations using data below and chair configuration to determine optimal polymer setup based on desired ride experience

User Weight 120 lbs or less _____ N/C
User Weight 121 - 165 lbs _____ N/C
User Weight 166 - 209 lbs _____ N/C
User Weight 210 - 275 lbs _____ N/C

Ride Experience Firmer _____ N/C
Ride Experience Softer _____ N/C

Custom Setup Front ISO Tower

Ultra Soft Gauge (Red) Front < 120 lbs _____ N/C
Soft Gauge (Blue) Front < 150 lbs _____ N/C
Mid Gauge (Black) Front < 250 lbs _____ N/C
Rigid Gauge (Green) Front < 275 lbs _____ N/C

Custom Setup Rear ISO Tower

Ultra Soft Gauge (Red) Rear < 120 lbs _____ N/C
Soft Gauge (Blue) Rear < 150 lbs _____ N/C
Mid Gauge (Black) Rear < 250 lbs _____ N/C
Rigid Gauge (Green) Rear < 275 lbs _____ N/C

Backrest

Back Post / Height Range / Back Height

Back Post	Price	Height Range	Back Height				
Height Adjustable	N/C	Height Adjustable Short Back Post (11" - 14")	11" ²	12"	13"	14"	
		Height Adjustable Medium Back Post (13" - 17")	13"	14"	15"	16"	17"
		Height Adjustable Tall Back Post (17" - 20")	17"	18"	19"	20"	
Fixed ¹ Height	N/C	Fixed Height Straight Back Post	9" ²	10" ²	11" ²	12" ³	13"
			14"	15"	16"	17"	18"

¹ Not available with back upholstery

² Not available with Fold Down Push Handle

Push Handles

Omit Push Handle _____ N/C
Standard Push Handle _____ N/C
Low Profile Push Handle _____ \$154
2" shorter than standard push handles
Fold Down Push Handle _____ \$113
Bolt-On Push Handle _____ \$179
Handles will be 1" - 2" above back height

Stroller Handles

Stroller Handles are removable and height adjustable

Single Stroller Handle _____ \$169
Double Stroller Handle _____ \$338
Not available with Push Handles

Adjustable Height Rigidizer Bar

Adjustable Height Rigidizer Bar _____ \$77
Non-Adjustable Height Rigidizer Bar _____ N/C
Not available with Fixed Height Back Post

Seat Back Angle

Standard is 90° (perpendicular to floor). Minus (-°) closes back angle. Plus (+°) opens back angle.

Standard +3° +6° +9° -3° -6°
-9° -12° _____ N/C

Back Upholstery Options

If selecting both upholstery and Axiom Back, the upholstery will be installed

Padded Velcro Adjustable with Standard Cover _____ N/C
Padded Velcro Adjustable with Air Mesh Breathable Cover _____ \$82
Tension Adjustable with Standard Cover (E2611) _____ \$359
Tension Adjustable with Air Mesh Breathable Cover (E2611) _____ \$390
Omit _____ (\$10)

U.S. Military Patches

Army	Navy	Marines	Air Force	
Coast Guard	US Purple Heart			\$92
Combo Army/Purple Heart		Combo Navy/Purple Heart		
Combo Marines/Purple Heart		Combo Air Force/Purple Heart		
Combo Coast Guard/Purple Heart				\$149

Front Seat Height and Casters

Caster Size / Footrest Taper / Front Seat Height

Select Front Seat Height and Footrest Taper in row corresponding to Caster Size. 6" casters not available with 85° and 90° Front Frame Bend.

Footrest Taper indicates bend of front frame creating footrest width. 2" Taper not available with seat widths less than 16". V-Front not available with seat widths less than 14". V-Front results in 4" reduction from seat width to footrest width. Taper is measured from outside of seat frame to outside of front tube. See reference E on page 8.

Front Seat Height is measured from floor to top of seat tube at front of seat sling. Minimum adjustment is +/- 1/2". See reference F on page 8.

Footrest Taper	Retail	Caster Size	Front Seat Height														
Straight (No Taper)	N/C	3"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"
		4"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"	
		5"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"		
		6"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"			
1"	N/C	3"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
		4"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							
		5"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"								
		6"	18"	18.5"	19"	19.5"	20"	20.5"									
2"	N/C	3"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
		4"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							
		5"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"								
		6"	18"	18.5"	19"	19.5"	20"	20.5"									
V - Front ¹	\$350	3"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
		4"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							
		5"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"								
		6"	18"	18.5"	19"	19.5"	20"	20.5"									

¹ Not available with Angle Adjustable Flip Under Footplate

Casters

		Caster Size				
		Price	3"	4"	5"	6"
Caster Type	.75" Rollerblade	N/C				
	.75" Lighted Rollerblade	\$72				
	1" Poly	N/C				
	1" Poly Aluminum	\$113				
	1" Pneumatic	\$87				
	1.5" Poly	\$67				
	1.5" Soft Roll Aluminum	\$210				

Fork Options

Standard Fork	N/C
Single Sided Fork	\$190
Frog Legs II Suspension System	\$461
Lightweight shock absorbing fork. Not included in Colored Anodizing Package.	

Caster Position

Optimized _____ N/C

Caster placement relative to seat frame has been set to maximize adjustability and minimize the footprint of the chair

Expanded Width _____ N/C

Caster arm is positioned approximately .75" wider than Optimized position

Footrest

Footplates

Tubular "Open" Footplate	N/C
<i>Not available with V-Front Taper</i>	
Tubular Footplate with ABS Cover	\$31
<i>Not available with V-Front Taper or footrest widths greater than 15.5". See Reference G on page 8.</i>	
Aluminum Angle Adjustable (K0040)	\$100
<i>Not available with V-Front Taper</i>	
Hybrid Angle Adjustable	\$97
Hybrid Angle Adjustable with Wings	\$133
<i>Raised sides aid in foot positioning</i>	
Angle Adjustable Flip Under (K0040, K0037)	\$231
<i>Not available with V-Front Taper. Available only with 9.5"-15.5" footrest width. See Reference G on page 8.</i>	

Seat to Footrest Length

*Measured from front edge of seat sling to top, rear of footrest.
Footrest length at least 2.5" shorter than Front Seat Height recommended. See reference H on page 8.*

Taper	Seat to Footrest length					
Straight and V-Front	9"	9.5"	10"	10.5"	11"	11.5"
	12"	12.5"	13"	13.5"	14"	14.5"
	15"	15.5"	16"	16.5"	17"	17.5"
	18"	18.5"	19"	19.5"		
1" Taper and 2" Taper	13.5"	14"	14.5"	15"	15.5"	16"
	16.5"	17"	17.5"	18"	18.5"	19"
	19.5"					

Footrest Protector

Footrest Protector	N/C
<i>Not available with Angle Adjustable Flip Under Footplate</i>	

Rear Seat Height and Wheels

Wheel Size / Rear Seat Height

Select Rear Seat Height in row corresponding to desired Wheel Size. For proper setup, selection is required when omitting rear wheels. Measured from floor to top of seat tube at front of back post. Rear Seat Height is custom to needs. See reference I on page 8.

Wheel Size	Rear Seat Height													
22"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"
24"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"		
25"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"		
26"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"				

Rear Wheel Type

		Rear Wheel Size				
		Price	22"	24"	25"	26"
Rear Wheel Type	Maxx Spoke	N/C				
	Mag	N/C				
	Superlight Spoke	\$323			1	
	Spinergy Spox	\$943				
	Spinergy LX	\$1179				

1 Available only with Superlight and Plastic Coated Handrims

Spinergy Options

Black Spokes Red Spokes White Spokes Blue Spokes _____ N/C

1 Available only with Spinergy LX

Rear Tire Type

Full Profile

Street Pneumatic 1 3/8" (E2211, E2212)	N/C
<i>Not available on 25" wheel size</i>	
Full Poly 1 3/8" (E2218)	N/C
<i>Not available on Superlight wheel or 25" or 26" wheel sizes</i>	
Pneumatic with Airless Insert 1 3/8" (E2211, E2213)	\$97
<i>Not available on Superlight wheel or 25" wheel size</i>	
Schwalbe HS-127 1 3/8" (E2211, E2212)	\$128
<i>Available only on 24" wheel size. Not available on Mag wheel.</i>	
Mountain 2" Black (E2211, E2212)	\$108
<i>Available only on 22", 24" and 25" MAXX Spoke and Spinergy wheels</i>	

Low Profile

Low Poly 1" (E2218)	\$77
<i>Not available on Superlight wheel, 25" or 26" wheel sizes</i>	
Sentinel Solid Tire 1" (E2218)	\$97
<i>Not available on Superlight wheel or 22" Mag wheel</i>	
High Pressure 1" (E2211, E2212)	\$97
<i>Not available on Mag wheel</i>	
Schwalbe One 1" (E2211, E2212)	\$144
<i>Available only on 24" and 25" wheel sizes. Not available on Mag wheel.</i>	
Schwalbe Marathon Plus Evolution 1" (E2211, E2212)	\$144
<i>Not available on Mag wheel or 22" wheel size</i>	



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com



Handrims

Standard Handrims

Aluminum Anodized	N/C
Superlight Aluminum Anodized	\$56
<i>Available only on 24" and 25" wheel sizes. Available only on MAXX Spoke, Superlight or Spinerger wheels.</i>	
Plastic Coated	\$118
Projection (8 Vertical Projections)	\$359
<i>Available only with full profile tires in combination with 22", 24", and 26" MAXX Spoke wheels, or 22" and 24" Mag wheels</i>	
Omit Handrim	N/C

Ergonomic Handrims

Not available with 20" or 26" wheels. Tab mount only available with 24" wheels.

Ergo Lite Regular Grip	\$477
Ergo Standard Regular Grip	\$456
Ergo Lite Extra Grip	\$528
Ergo Standard Extra Grip	\$507
Ergo Lite Omit Grip	\$405
Ergo Standard Omit Grip	\$384

Handrim Options

Handrim Mount

If no selection is made, Standard Mount will be used

Close Mount	N/C
-------------	-----

Micro-Grip

3M Micro Grip	\$67
<i>Not available on Plastic Coated or Projection Handrims</i>	

Axles

Quick Release	N/C
Quad Quick Release	\$190
<i>Not available with Mag or Spinerger wheels</i>	

Rear Wheel Camber

0°	2°	4°	6°	8°	N/C
----	----	----	----	----	-----

Rear Wheel Spacing

Measured from outside of back to inside of rear tire. 1.75" minimum Rear Wheel Spacing with Height Adjustable Armrests. 1" minimum Rear Wheel Spacing with side guards. 1.25" minimum Rear Wheel Spacing with Spinerger Wheels. See reference K on page 8.

0.75"	1"	1.25"	1.5"	1.75"	N/C
-------	----	-------	------	-------	-----

Center of Gravity Presets

Measured from front of back post to center of rear axle. 0" indicates axle will be directly under back post. See reference J on page 8.

Amputee Positions					
-1.5"	-1.25"	-1"	-.75"	-.5"	-.25"
Standard Positions					
0"	.25"	.5"	.75"	1"	1.25"
1.5"	1.75"	2"	2.25"	2.5"	2.75"
3"	3.25"	3.5"	3.75"	4"	4.25"

Wheel Locks

Wheel Locks

Push to Lock	N/C
Push to Lock Flush Mount	N/C
<i>Not available with Mountain tires</i>	
Pull to Lock	N/C
Low Profile Scissor Lock	\$51
<i>Not available with Low Poly, Full Poly or Sentinel Solid tires</i>	
Short Thro Scissor Lock	\$164
Omit	N/C

Wheel Lock Options

Extension Handles (E0961)	\$86
<i>Available only with Push to Lock or Pull to Lock Wheel Locks</i>	
Grade Aids (E0974)	\$154
<i>Available only with Push to Lock Wheel Locks and Pneumatic or Pneumatic with Airless Insert tires</i>	

Armrests

Armrest Type	Length	Price
Height Adjustable T-Arm Tall (11.5"-15") E0973	Desk	\$318
	Full	
Height Adjustable T-Arm (8.5"-13.5") E0973	Desk	\$318
	Full	

¹ Certain configurations may dictate selection

² Includes Composite Side Guards

³ 18.5" is the maximum Rear Seat Height with 24" rear wheels and tall swing away arms

Armrest Type	Size	Price
Swing Away (8.5"-12.5") E0973 ¹	Short	\$244
	Tall	
Swing Away with Side Guard (8.5"-12.5") E0973 ^{1,2}	Short	\$292
	Tall	
Omit Armrests		N/C



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com



Side Guards

Side Guards

Not available with Height Adjustable T-Arm or Swing Away with Side Guard Armrests

Composite Side Guards - Clamp-On Receiver (K0108)	\$154
Aluminum Straight - Clamp On Receiver - Black Matte (K0108)	\$231
Aluminum Straight - Clamp-On Receiver - Match Seat Frame Color (K0108)	\$282

Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Black Matte (K0108)	\$313
Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Match Seat Frame Color (K0108)	\$364
Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Match Base Frame Color (K0108)	\$364
Carbon Fiber Adjustable Fender - Clamp-On Receiver (K0108)	\$528

Accessories

Anti - Tips

Rear Anti-Tips (E0971)	\$169
User Activated - Pair	\$349
User Activated - Left	\$174
User Activated - Right	\$174
Omit	N/C

Pelvic Positioning Belt

1 1/2" Auto Buckle Pelvic Positioning Belt (E0978)	\$87
1 1/2" Padded Auto Buckle Pelvic Positioning Belt (E0978)	\$179
Small Bodypoint Evoflex (16-24") (E0978)	\$193
Medium Bodypoint Evoflex (19-29") (E0978)	\$193
Large Bodypoint Evoflex (25-37") (E0978)	\$200

Belt Mounting Kit

Ki Mobility Belt Mounting Clamp	\$36
---------------------------------	------

Calf Strap

Mounting hardware included with Calf Straps

Velcro Adjustable with Mounting Hardware (K0038)	\$46
Padded Velcro Adjustable with Mounting Hardware (K0038)	\$70
Bodypoint Padded AeroMesh with Mounting Hardware (K0038)	\$123
Calf Strap Mounting Hardware (Extra)	\$26

Other Accessories

Tool Kit	\$46
Removable Underseat Pouch	\$62
Ki Mobility Backpack	\$67
Luggage Carrier	\$87
Under Chair Carrier and Removable Bag	\$87

Not available with Seat Widths less than 14" or scissor locks

Color

Paint Options

If there is no color preference Black is recommended

Options	Price	Colors																				
		Gloss												Matte								
		Black	Blue Skies	Bubblegum Pink	Candy Blue	Candy Purple	Candy Red	Copper	Granny Smith	Metallic Orange	Silver	Teal	Yellow	Charcoal Gray	Emerald Green	Iridescent Burgundy	Iridescent Navy	Military Green	Retro Red	Royal Blue	Shadow Black	Smooth White
Seat Frame	N/C																					
Base Frame	N/C																					
Backrest Release Bar	N/C	Black Anodized																				
	\$51	Paint to Match Seat Frame																				
	\$51	Paint to Match Base Frame																				
	\$51	Paint Other Color (Select Option Below)																				
Mag Color																						


Highlight Color

Options	Price	Colors																	
		Black	Blue	Gray	Green	Orange	Pink	Purple	Red	Yellow	Black	Blue	Bright Green	Gold	Orange	Pewter	Pink	Purple	Red
Highlights	N/C																		
Colored Anodizing	Back Plate ¹	\$77																	
	Caster Fork ²	\$77																	
	Side Guard Receiver	\$77																	
	Camber Tube	\$77																	

¹ Not available with Transit Option

² Available only with Standard or Single Sided

Color Reference	
A	Seat Frame
B	Base Frame
C	Highlights

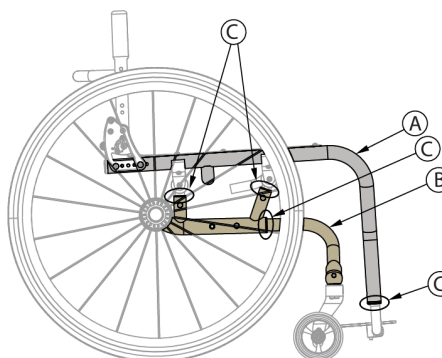

References

A. Seat Width *See Diagram 1*

Measured from outside of frame tube on one side to outside of frame tube on other side.

B. Seat Depth *See Diagram 3*

Measured from front of back posts to front edge of seat sling. Seat sling starts at beginning of bend at front of frame.

C. Sling Position *See Diagram 2*

In Performance Position (0°), sling is at front of frame to keep chair shorter and more maneuverable. The 1" or 2" seat sling position extends the frame in front of the sling by that amount. Adding more frame can improve stability and provide support to aid in transfers.

D. Front Frame Bend *See Diagram 3*

Angle between front seat tube and ground.

E. Footrest Taper *See Diagram 1*

Indicates bend of front frame creating footrest. Taper is measured from outside of seat frame to outside of front tube.

F. Front Seat Height *See Diagram 1*

Measured from floor to top of seat tube at front of seat sling.

G. Footrest Width *See Diagram 1*

Measured from inside of front tube to inside of front tube on other side. Footrest width is listed below for each seat width and taper.

Seat Width	Straight	1" Taper	2" Taper	V-Front
Outside Measurement	2" Narrower than Seat Width	4" Narrower than Seat Width	6" Narrower than Seat Width	4" Narrower than Seat Width
12"	9.5"	7.5"		
13"	10.5"	8.5"		
14"	11.5"	9.5"		9.5"
15"	12.5"	10.5"		10.5"
16"	13.5"	11.5"	9.5"	11.5"
17"	14.5"	12.5"	10.5"	12.5"
18"	15.5"	13.5"	11.5"	13.5"
19"	16.5"	14.5"	12.5"	14.5"
20"	17.5"	15.5"	13.5"	15.5"

H. Seat to Footrest Length *See Diagram 3*

Measured from front edge of seat sling to top rear of footrest. Footrest length of at least 2.5" shorter than front seat height recommended.

I. Rear Seat Height *See Diagram 3*

Measured from floor to top of seat tube at front of back post.

J. Center of Gravity Preset *See Diagram 3*

Measured from front of back post to center of rear axle. 0" indicates axle will be directly under back post.

K. Rear Wheel Spacing *See Diagram 1*

Measured from outside of seat back to inside of rear tire. Adjustable from .75" to 1.75".

Diagram 1

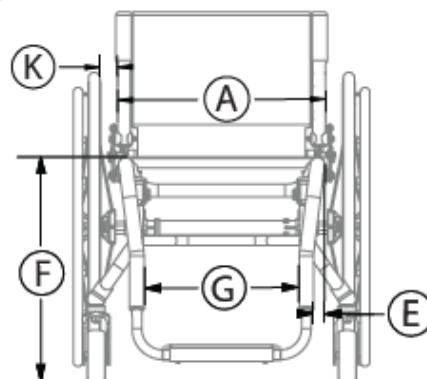


Diagram 2

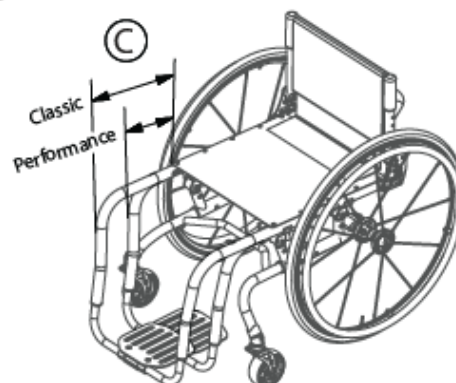


Diagram 3

