



Phone (800) 981-1540 | Fax (715) 254-0996
sales@kimobility.com | www.kimobility.com

ROGUE² TTL

Company:

Ship To:

Account Number:

Date:

Address:

Quote: PO Number:

City:

State:

ATP:

Zip:

Phone:

Marked For:

Email/Fax:

Associated Quote/Order#:

Effective: 1/10/2024

Rogue2 TTL - Transit Included (K0005, E1235) \$3343

Rogue2 TTL - Transit Not Included (K0005, E1235) \$3023

Rogue Standard Frame 275 lb weight capacity

Frame

Seat Width

See reference A on page 7

12"	N/C
13"	N/C
14"	N/C
15"	N/C
16"	N/C
17"	N/C
18"	N/C
19"	N/C
20" (E2201)	\$564

Seat Depth

See reference B on page 7

14"	N/C
15"	N/C
16"	N/C
17"	N/C
18"	N/C
19"	N/C
20" (E2203)	\$564

Transit Option

Transit System	\$340
Cannot be retrofitted. Requires Expanded Width Caster Position.	
Omit	N/C

Adjustable Depth

Adds the capability to grow seat in depth

No Rear Adjustment	N/C
1/2"	N/C
1"	N/C
2"	N/C

Sling Position

In Performance Position (0"), sling is at front of frame. The 1" or 2" sling position extends the frame in front of the sling by that amount. See reference C on page 7.

0" (Performance)	N/C
1"	N/C
2" (Classic)	N/C

Seat Pan

Standard Seat Sling	N/C
Aluminum Solid Seat Pan (E2231)	\$272

Front Frame Bend

Angle between front seat tube and ground. See reference D on page 7.

90°	N/C
85°	N/C
80°	N/C
75°	N/C
70°	N/C

Backrest

Back Post / Height Range / Back Height

Back Post	Price	Height Range	Back Height				
Height Adjustable	N/C	Height Adjustable Short Back Post	11" ²	12"	13"	14"	
		Height Adjustable Medium Back Post	13"	14"	15"	16"	17"
		Height Adjustable Tall Back Post	17"	18"	19"	20"	
Fixed Height ¹	N/C	Fixed Height Straight Back Post	9" ²	10" ²	11" ²	12"	13"
			14"	15"	16"	17"	18"

¹ Not available with back upholstery² Not available with Fold Down Push Handle

HCPCS codes provided are based on code verification by the PDAC or our interpretation of the code definitions.

Proper use of HCPCS codes does not ensure coverage or payment. For coverage information, verify the appropriate payer's coverage policy.

DCN1018.2 Pricing and specifications subject to change without notice.

Seat Back Angle

Standard is 90° (perpendicular to floor). Minus (-°) closes back angle. Plus (+°) opens back angle.

Standard	+3°	+6°	+9°	-3°	-6°	N/C
-9°	-12°					

Push Handles

Omit Push Handle	N/C
Standard Push Handle	N/C
Low Profile Push Handle 2" shorter than standard push handles	\$154
Bolt-On Push Handle Handles will be 1" - 2" above back height	\$179
Fold Down Push Handle	\$113

Back Upholstery Options

Available only with Height Adjustable Back Posts. If selecting both upholstery and Axiom Back, the upholstery will be installed.

Padded Velcro Adjustable with Standard Cover	N/C
Padded Velcro Adjustable with Air Mesh Breathable Cover	\$77
Tension Adjustable with Standard Cover (E2611)	\$323
Tension Adjustable with Air Mesh Breathable Cover (E2611)	\$384
Omit	(\$10)

Stroller Handle

Stroller Handles are removable and height adjustable

Single Stroller Handle	\$169
Double Stroller Handle Not available with Push Handles	\$338

Adjustable Height Rigidizer Bar

Adjustable Height Rigidizer Bar	\$77
Non-Adjustable Height Rigidizer Bar Not Available with Fixed Height Back Post	N/C

US Military Service Patches

Army	Navy	Marines	Air Force	
Coast Guard	US Purple Heart			\$92
Combo Army/Purple Heart		Combo Navy/Purple Heart		
Combo Marines/Purple Heart		Combo Air Force/Purple Heart		
Combo Coast Guard/Purple Heart				\$149

Front Seat Height and Casters

Caster Size / Footrest Taper / Front Seat Height

Select Front Seat Height and Footrest Taper in row corresponding to Caster Size. 6" casters not available with 85° and 90° Front Frame Bend.

Footrest Taper indicates bend of front frame creating footrest width. Taper is measured from outside of seat frame to outside of front tube. 2" Taper not available with 75° Front Frame Bend. Taper is not available with 70° Front Frame Bend. See reference E on page 7.

Front Seat Height is measured from floor to top of seat tube at front of seat sling. Adjustable up or down by 1/2". See reference F on page 7.

Footrest Taper	Price	Caster Size	Front Seat Height														
No Taper (Straight)	N/C	3"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"
		4"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"	
		5"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"		
		6"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"			
1"	N/C	3"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
		4"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							
		5"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"								
		6"	18"	18.5"	19"	19.5"	20"	20.5"									
2"	N/C	3"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"						
		4"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"							
		5"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"								
		6"	18"	18.5"	19"	19.5"	20"	20.5"									
3.5° V-Front	\$103	3"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"
		4"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"	
		5"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"		
		6"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"			
7° V-Front	\$103	3"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"
		4"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"	
		5"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"		
		6"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"	20.5"			

Casters

		Caster Size				
		Price	3"	4"	5"	6"
Caster Type	.75" Rollerblade	N/C				
	.75" Lighted Rollerblade	N/C				
	1" Poly	N/C				
	1" Poly Aluminum	\$82				
	1" Pneumatic	N/C				
	1.5" Poly	N/C				
	1.5" Soft Roll Aluminum	\$210				

Caster Position

See reference L on page 7

Optimized	N/C
Caster Placement minimizes the footprint of the chair	
Expanded Width	N/C
Caster arm is positioned approximately .75" wider than Optimized position	

Fork Options

Standard Fork	N/C
Single Sided Fork	\$190
Frog Legs II Suspension System	\$461
Lightweight shock absorbing fork. Not included in Colored Anodizing Package.	

Footrest

Footplate

Tubular "Open" Footplate	N/C
Not available with V-Taper	
Tubular Footplate with ABS Cover	N/C
Not available w/footrest widths greater than 15.5". See Reference G on page 7.	
Not available with V-Taper.	
Aluminum Angle Adjustable (K0040)	\$100
Aluminum Angle Adjustable with Riser (K0040)	\$169
High Mount Aluminum Angle Adjustable (K0040)	\$169
Not available with V-Taper	
Angle Adjustable Flip Under (K0040, K0037)	\$231
Not available with footrest widths less than 9.5". Not available with V-Taper.	
See Reference G on page 7.	
High Mount Angle Adjustable Flip Under (K0040, K0037)	\$277
Not available w/footrest widths greater than 15.5". See Reference G on page 7. Not available with V-Taper.	
Hybrid Angle Adjustable	\$92
Hybrid Angle Adjustable with Wings	\$133

Footrest Protector

Footrest Protector	N/C
Not available with Angle Adjustable Flip Under, High Mount Angle Adjustable Flip Under or High Mount Aluminum Angle Adjustable Footplates	

Seat to Footrest Length

Measured from front edge of seat sling to top, rear of footrest. Footrest length at least 2.5" shorter than Front Seat Height recommended. See reference H on page 7.

8"	8.5"	9"	9.5"	10"	10.5"
11"	11.5"	12"	12.5"	13"	13.5"
14"	14.5"	15"	15.5"	16"	16.5"
17"	17.5"	18"	18.5"	19"	19.5"

Rear Seat Height and Wheels

Wheel Size / Rear Seat Height

Select Rear Seat Height in row corresponding to desired Wheel Size. For proper setup, selection is required when omitting rear wheels. Measured from floor to top of seat tube at front of back post. Rear Seat Height is custom to needs. See reference I on page 7.

Wheel	Rear Seat Height															
20"	12.5" ¹	13"	13.5"	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"
22"	13.5" ¹	14"	14.5"	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"		
24"	14.5" ¹	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"				
25"	14.5" ¹	15"	15.5"	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"				
26"	15.5" ¹	16"	16.5"	17"	17.5"	18"	18.5"	19"	19.5"	20"						

¹Available only with Low Profile tires

One Arm Drive

One Arm Drive - Quick Release (E0958) \$1532

Available only with 20", 22" and 24" spoke wheels and quick release axles.
 Spoke wheel style provided is exclusive to OAD. Standard handrim will be Aluminum Anodized. Limitations exist based on rear wheel spacing, camber and armrest selections.

Left Side Drive N/C

Right Side Drive N/C

Aluminum Drive Handrim N/C

Poly Coated Drive Handrim \$205

Spinergy Options

Select spoke color and handrim tab for Spinergy wheels

Black Spokes Red Spokes Blue Spokes White Spokes N/C

Rear Tire Type

Full Poly

Street Pneumatic 1 3/8" (E2211, E2212) N/C

Not available on 25" wheel size

Full Poly 1 3/8" (E2218) N/C

Not available on Superlight wheel or 25" or 26" wheel sizes

Pneumatic with Airless Insert 1 3/8" (E2211, E2213) \$97

Not available on Superlight wheel or 25" wheel size

Schwalbe HS-127 1 3/8" (E2211, E2212) \$128

Available only on 24" wheel size. Not available on Mag wheel

Mountain 2" Black (E2211, E2212) \$108

Available only on 22", 24" and 25" MAXX wheels and Spinergy wheels

Wheels

No selection needed with One Arm Drive

		Rear Wheel Size					
		Price	20"	22"	24"	25"	26"
Rear Wheel Type	Maxx Spoke	N/C					
	Mag	N/C					
	Mag (Color) ²	\$120					
	Superlight Spoke	\$323					
	Spinergy Spox	\$943					
	Spinergy LX	\$1179					

1 Available only with Superlight and Plastic Coated Handrims

2 Color selection on page 6

Low Profile

Low Poly 1" (E2218) N/C

Not available on Superlight wheel, 25" or 26" wheel sizes

Sentinel Solid Tire 1" \$97

Not available on Superlight wheel

High Pressure 1" (E2211, E2212) N/C

Not available on Mag wheel

Schwalbe One 1" (E2211, E2212) \$128

Available only on 24" and 25" wheel sizes. Not available on Mag wheel

Schwalbe Marathon Plus Evolution 1" (E2211, E2212) \$144

Not available on Mag wheel, 20" or 22" wheel sizes

Handrims

No selection needed with One Arm Drive

Standard Handrims

Aluminum Anodized N/C

Superlight Aluminum Anodized \$51

Available only on 24" and 25" wheel sizes. Available only on MAXX Spoke, Superlight or Spinergy wheels.

Plastic Coated \$51

Projection (8 Vertical Projections) \$359

Available only with full profile tires in combination with 22", 24", and 26" MAXX Spoke wheels, or 22" and 24" Mag wheels

Omit Handrim N/C

Ergonomic Handrims

Not available with 20" or 26" wheels. Tab mount only available with 24" wheels

Lite Regular Grip \$477

Standard Regular Grip \$456

Lite Extra Grip \$528

Standard Extra Grip \$507

Lite Omit Grip \$405

Standard Omit Grip \$384

Center of Gravity presets

Measured from front of back post to center of rear axle. 0" indicates axle will be directly under back post. See reference J on page 7.

Amputee Positions				
-1.5"	-1"	-.5"	0"	.25"
Standard Positions				
.5"	.75"	1"	1.25"	1.5"
1.75"	2"	2.25"	2.5"	2.75"
3"	3.25"	3.5"	3.75"	4"
4.25"	4.5"	4.75"	5"	

Rear Wheel Spacing

1" minimum with 0° camber. 1.5" minimum with T-Arms. The following apply if One Arm Drive is selected: 1.75" minimum with T-Arms. 1.25" minimum with select Rear Seat Heights. See Reference K on page 7.

0.75" 1" 1.25" 1.5" 1.75" N/C

Handrim Options

Handrim Mount

If no option is selected, Standard Mount will be used

Close Mount \$26

Micro-Grip

3M Micro Grip \$67

Available only with Aluminum Anodized and Plastic Coated Handrims

Axles

Quick Release N/C

Quad Quick Release \$190

Not available with Mag or Spinergy wheels

Rear Wheel Camber

The following apply if One Arm Drive is selected: 6° and 8° not available. 4° not available with T-Arms.

0° 2° 4° 6° 8° N/C

Wheel Locks

Wheel Lock	
Push to Lock	N/C
Push to Lock Flush Mount	N/C
Pull to Lock	N/C
Under Seat Scissor Lock	N/C
Low Profile Scissor Lock	N/C
<i>Not available with Low Poly, Full Poly or Sentinel Solid tires</i>	
Short Thro Scissor Lock	\$82
Omit	N/C

Wheel Lock Options

Extension Handles (E0961)	\$86
<i>Available only with Push to Lock or Pull to Lock Wheel Locks</i>	
Grade Aids (E0974)	\$154
<i>Available only with Push to Lock Wheel Locks and Pneumatic or Pneumatic with Airless Insert tires</i>	

Armrests

Armrest Type	Length	Price
Height Adjustable T-Arm Tall (11.5"-15") E0973	Desk	\$318
	Full	
Height Adjustable T-Arm (8.5"-13.5") E0973	Desk	\$318
	Full	
Height adjustable T-Arm Low (6.5"-10.5") E0973 ¹	Desk	\$318
	Full	

¹ If requested configuration is unavailable, standard height T-Arm will be used. 14" minimum seat depth.

² Includes direct mount receiver

Armrest Type	Price
Swing Away (8.5"-12.5") E0973	\$244
Swing Away with Side Guard (8.5"-12.5") E0973 ²	\$292
Omit Armrests	N/C

Side Guards

Direct Mount Side Guards

Not available with T-Arms or Swing Away with Side Guard Armrests

Composite Side Guards - Direct Mount Receiver (K0108)	\$149
Aluminum Straight - Direct Mount Receiver - Black Matte (K0108)	\$200
Aluminum Straight - Direct Mount Receiver - Match Frame Color (K0108)	\$251
<i>Not available with Hydrographics</i>	
Aluminum Adjustable Fender w/Foam Pad - Direct Mount Receiver - Black Matte (K0108)	\$282
<i>Not available with Adjustable Depth greater than 1/2"</i>	
Aluminum Adjustable Fender w/Foam Pad - Direct Mount Receiver - Match Frame Color (K0108)	\$333
<i>Not available with Adjustable Depth greater than 1/2". Not available with Hydrographics.</i>	
Carbon Fiber Adjustable Fender - Direct Mount Receiver (K0108)	\$497
<i>Not available with Adjustable Depth greater than 1/2"</i>	

Clamp-On Mount Side Guards

Not available with T-Arms or Swing Away with Side Guard Armrests

Composite Side Guards - Clamp-On Receiver (K0108)	\$179
Aluminum Straight - Clamp On Receiver - Black Matte (K0108)	\$231
Aluminum Straight - Clamp-On Receiver - Match Frame Color (K0108)	\$282
<i>Not available with Hydrographics</i>	
Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Black Matte (K0108)	\$313
Aluminum Adjustable Fender w/Foam Pad - Clamp-On Receiver - Match Frame Color (K0108)	\$364
<i>Not available with Hydrographics</i>	
Carbon Fiber Adjustable Fender - Clamp-On Receiver (K0108)	\$528

Accessories

Anti-Tip

Rear Anti-Tips (E0971)	\$164
User Activated - Pair	\$349
User Activated - Left	\$174
User Activated - Right	\$174
Omit	N/C

Calf Strap

Velcro Adjustable (K0038)	\$43
Padded Velcro Adjustable (K0038)	\$70
Bodypoint Padded AeroMesh (K0038)	\$121

Pelvic Positioning Belt

1 1/2" Auto Buckle Pelvic Positioning Belt (E0978)	\$87
1 1/2" Padded Auto Buckle Pelvic Positioning Belt (E0978)	\$174
Small Bodypoint Evoflex (16-24") (E0978)	\$193
Medium Bodypoint Evoflex (19-29") (E0978)	\$193
Large Bodypoint Evoflex (25-37") (E0978)	\$200

Belt Mounting Kit

Ki Mobility Belt Mounting Clamp	\$36
Bodypoint Belt Mounting Bracket Kit	\$113

Other Accessories

Tool Kit	\$51
Removable Underseat Pouch	\$51
Ki Mobility Backpack	\$67
Luggage Carrier	\$87
Black Neoprene Impact Guards	\$97
Under Chair Carrier and Removable Bag	\$87
<i>Not available with Seat Widths less than 14" or scissor locks</i>	
Cane and Crutch Holder	\$200

Color

Options	Price	Colors																			
		Gloss												Matte							
		Black	Blue Skies	Bubblegum Pink	Candy Blue	Candy Purple	Candy Red	Copper	Granny Smith	MRLalic Orange	Silver	Teal	Yellow	Charcoal Gray	Emerald Green	Iridescent BuRLundy	Iridescent Navy	Military Green	Retro Red	Royal Blue	Shadow Black
Frame	N/C																				
Backrest Release Bar	\$51																				
	N/C	Black Anodized																			
MAXX Mag Color																					

Colored Anodizing Package

Select desired color. If no selection is made, black will be used.

	Color	Black ¹	Blue	Bright Green	Gold	Orange	Pewter	Pink	Purple	Red
Retail		N/C	\$26	\$26	\$26	\$26	\$26	\$26	\$26	\$26
Option	Back Plates ²									
	Camber Tube ³									
	Towers									
	Side Guard Receiver									
	Caster Fork ³									

¹ Black is no charge

² Not available with Transit Option

³ Available only with Standard or Single Sided

References

A. Seat Width *See Diagram 1*

Measured from outside of frame tube on one side to outside of frame tube on other side.

B. Seat Depth *See Diagram 3*

Measured from front of back posts to front edge of seat sling. Seat sling starts at beginning of bend at front of frame.

C. Sling Position *See Diagram 2*

In Performance Position (0°), sling is at front of frame to keep chair shorter and more maneuverable. The 1° or 2° seat sling position extends the frame in front of the sling by that amount. Adding more frame can improve stability and provide support to aid in transfers.

D. Front Frame Bend *See Diagram 3*

Angle between front seat tube and ground.

E. Footrest Taper *See Diagram 1*

Indicates bend of front frame creating footrest. Taper is measured from outside of seat frame to outside of front tube.

F. Front Seat Height *See Diagram 1*

Measured from floor to top of seat tube at front of seat sling.

G. Footrest Width *See Diagram 1*

Measured from inside of front tube to inside of front tube on other side. Footrest width is listed below for each seat width and taper.

Seat Width	Straight	1" Y Taper	2" Y Taper	3.5° V Taper	7° V Taper
Outside Measurement	2" Narrower than Seat Width	4" Narrower than Seat Width	6" Narrower than Seat Width	4" Narrower than Seat Width	6" Narrower than Seat Width
12"	9.5"	7.5"		7.5"	
13"	10.5"	8.5"		8.5"	
14"	11.5"	9.5"		9.5"	
15"	12.5"	10.5"		10.5"	
16"	13.5"	11.5"	9.5"	11.5"	9.5"
17"	14.5"	12.5"	10.5"	12.5"	10.5"
18"	15.5"	13.5"	11.5"	13.5"	11.5"
19"	16.5"	14.5"	12.5"	14.5"	12.5"
20"	17.5"	15.5"	13.5"	15.5"	13.5"

H. Seat to Footrest Length *See Diagram 3*

Measured from front edge of seat sling to top rear of footrest. Footrest length of at least 2.5" shorter than front seat height recommended.

I. Rear Seat Height *See Diagram 3*

Measured from floor to top of seat tube at front of back post. Rear seat height is custom to needs.

J. Center of Gravity Preset *See Diagram 3*

Measured from front of back post to center of rear axle. 0° indicates axle will be directly under back post.

K. Rear Wheel Spacing *See Diagram 1*

Measured from outside of seat back to inside of rear tire. Adjustable out .5" from setting.

L. Caster Position *See Diagram 4*

The Optimized Position keeps the casters tighter to the frame for enhanced maneuverability. Expanded Position pushes the casters out .75" past the Optimized Position for increased stability.

Diagram 1




Diagram 2

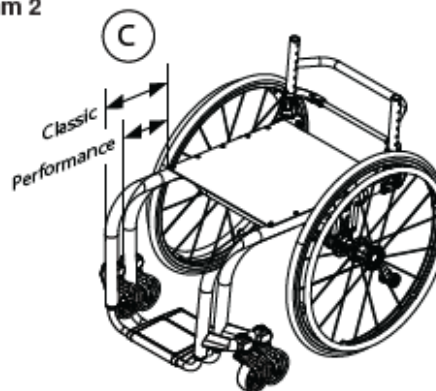


Diagram 3

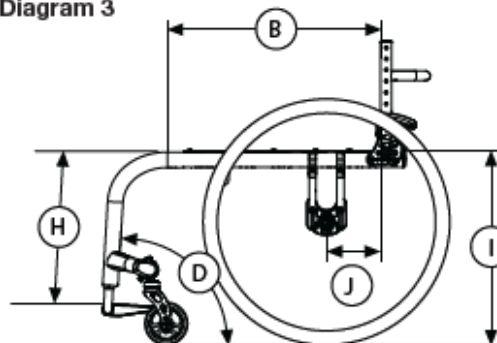


Diagram 4

